

1U 15" / 17" TFT Display with Keyboard and Pointing Device

DISPLAY SPECIFICATIONS

Display Type:	Active matrix TFT LCD	Resolution:	640 x 350
Colors:	16.7 million colors		640 x 480
Contrast Ratio:	400:1 typical		800 x 600
Brightness:	250 cd/m ² typical	Display Area:	1024 x 768
Viewing Angle:	17" 15"		1280 x 1024 (17")
	Horizontal: 160° 160°	Horizontal Frequency:	15" - 15" Diagonal
	Vertical: 130° 160°		17" - 17" Diagonal
Response Time:	25ms.	Vertical Frequency:	15" - 31.47 to 68 KHz
			17" - 31.5 to 80 KHz
			15" - 60 to 85 Hz
			17" - 56 to 75 Hz.

KEYBOARD AND MOUSE SPECIFICATIONS

Rollover:	Alpha N-key rollover.
Auto repeat:	Yes.
Self Diagnostics:	At power on and system reset.
Data Buffer:	All codes buffered before sending.
Operating voltage:	+5 VDC +/- 5%.
Operating current:	200 mA.
Interface:	Keyboard: PS/2. Mouse: PS/2
Buttons:	Left and Right (Touchpad) Left, Right, Lock (Trackball)
Compatibility:	DOS, Windows 3.X, Windows 95/98, Windows NT, Windows 2000, XP.

FRONT PANEL OPTIONS



Unit in closed position



WDM-61X Keyboard



WDM-61XT Keyboard



WDM-62X Keyboard



WDM-61X



WDM-61XR



WDM-61XC




WDM-61XL

ORDERING INFORMATION

Order by model number as shown:

WDM-6(X)(X)(X)(X)(X)

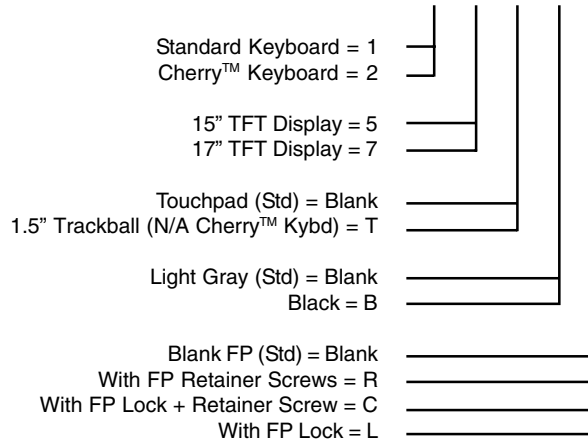

For other options or more information please contact our sales department.

1U 15" / 17" TFT Display with Keyboard and Pointing Device



WDM-617L



WDM-617BL



WDM-617T

FEATURES

- ◆ 1 rack unit high (1.75").
- ◆ 15" or 17" active matrix TFT LCD display.
- ◆ Display securely held in closed position.
- ◆ TFT surface protected by Lexan™ shield.
- ◆ Attaches directly to a standard VGA card.
- ◆ Keyboard with Touchpad or 1.5" Trackball.
- ◆ Display powers off when in closed position.
- ◆ 15" 16.7M Colors, 1024 x 768 maximum resolution.
- ◆ 17" 16.7M Colors, 1280 x 1024 maximum resolution.
- ◆ Wide viewing angle, high brightness and contrast.
- ◆ 26" Ball Bearing slides with extensions included.
- ◆ Recessed front panel handle fits behind rack doors.

OPTIONS

- 2 button touchpad.**
- 3 button 1.5" industrial trackball.**
- Color choice of light gray or black.**
- Front panel retaining screws.**
- Front panel lock (locks unit in rack).**
- Telco rack (2 post) mounting brackets.**

GENERAL SPECIFICATIONS

Dimensions:

19.0" (W) x 1.75" (H) x 25.75" (D)

Weight:

27 lbs

Power (TFT Display):

90 - 260 VAC, 50/60 Hz.

60 Watts maximum

On-Screen Controls:

Brightness, Contrast, Horizontal & Vertical Position, Auto Adjust, OSD H & V Position, Load and Save Values

Plug & Play:

DDC1 and DDC2B

Temperature:

Operating: 0°C to 50°C

Storage: -20°C to 60°C

Humidity:

Operating: 10 to 85% RH (max)

Input Signal (VGA):

R.G.B. analog video, TTL H & V sync.

Input Connector:

Display: 15-pin mini D-Shell

Keyboard: PS/2

Mouse: PS/2

ORDERING INFORMATION

See other side.

